


VACUUM

FORMING MACHINE

• MODELS • 3-DIMENSIONAL SIGNS • SKINPACKAGING • TOYS • TRAYS, BINS, CASES • BLISTERS

FV-30DA

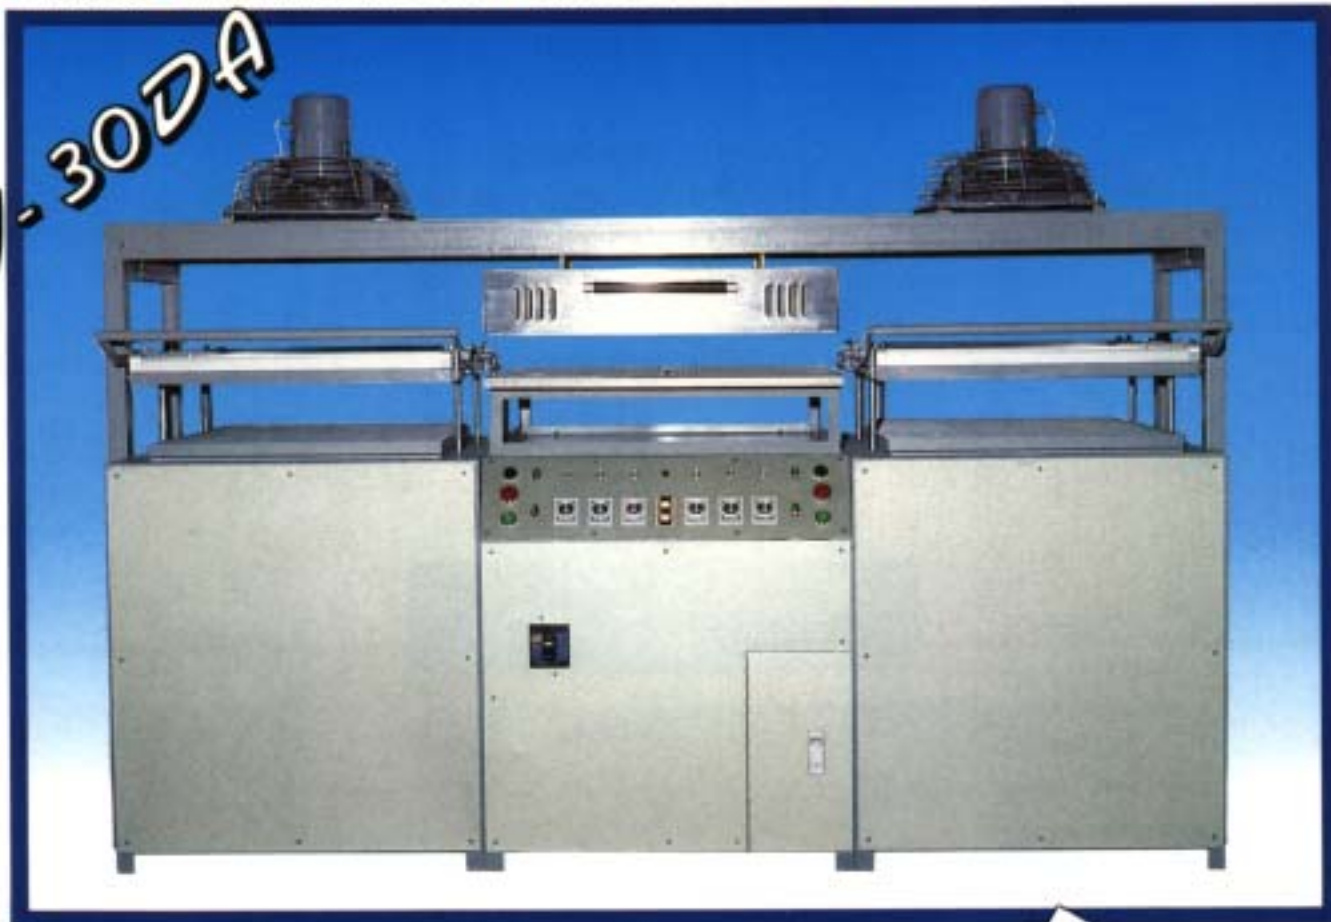

SANDEN
ELECTRONIC EQUIPMENT LIMITED



Sanden Electronic Equipment Ltd.

9/F, BLOCK E, MAI TAK INDUSTRIAL BUILDING, 221 WAI YIP STREET,
KWUN TONG, KOWLOON, HONG KONG

TELEPHONES: (852)2345-1111 FAX: (852)2797-8047 TELEX: 52984 SANFM HX
EMAIL ADDRESS: info@sanden.com.hk WEB SITE: www.sanden.com.hk

新電電機有限公司
九龍官塘偉業街二二一號
吳德工業大廈下座九字樓

Features :

• Semi-Automatic Operation

This model is designed so that it may be operated manually or semi-automatically. It is constructed to handle rolls of plastic material 24"(60cm) wide on a vacuum table measuring 22"(55cm) wide by 28"(70cm) long. Loading of plastic film is done manually. The semi-automatic operation cycle then pre-heats the plastic sheet, draws the vacuum, cools and lifts the plastic sheet from the moulds. The completed section is then cut off manually before repeating the next cycle.

• Electronic and Pneumatic Controls

The machine has a full range of electronic and pneumatic control for easy and accurate use with a self-contained vacuum pump. Independent air compressor is required. Heating of the plastic is accomplished by the specifically designed heating elements so arranged that heat effect is even with minimum blemishes formed on the plastic material. Temperature of the heating elements is not adjustable but controlled by the heating timer.

• Highly Adaptable

Most of the modern thermoplastic films, such as PVC, polyethylene, polycarbonate, polystyrene and acetate, of 0.2mm to 0.8mm thickness can be used. This model is adaptable to a wide range of end products. It is highly dependable and economical to use, especially ideal for low volume production and trial forming of sample articles.

• Single head model is also available, for more information, please contact us.

Specifications:

Item\Model	FV-30DA	FV-30SA
Suction Tray Forming Area	550mmx700mm (22" x 28")	
Max. Forming Frame Holder	600mmx750mm (24" x 30")	
Max. Forming Depth	125 mm (5")	
Cylinder stroke	150 mm (6")	
Thickness of Film	0.2 mm - 1 mm	
Dimensions	2188mmx1113mmx1575mm	1550mmx1113mmx1575mm
Heater	8000 Watts	
Vaccum Pump Capacity	1 H.P.	
Air Compressor Capacity	1 H.P.	
Power Supply	3 Phase 220V~440V	
Net Weight	520 Kg	280 Kg
Gross Weight	670 Kg	340 Kg
Packing	4.4 cbm	3.4 cbm

The above specifications are subject to change without prior notice.



Sanden Electronic Equipment Ltd.

9/F, BLOCK E, MAI TAK INDUSTRIAL BUILDING, 221 WAI YIP STREET,
KWUN TONG, KOWLOON, HONG KONG

TELEPHONES: (852)2345-1111 FAX: (852)2797-8047 TELEX: 52984 SANFM HX
EMAIL ADDRESS: info@sanden.com.hk WEB SITE: www.sanden.com.hk

新電電機有限公司
九龍官塘偉業街二二一號
吳德工業大廈上座九字樓



Sanden Electronic Equipment Ltd.

9/F, BLOCK E, MAI TAK INDUSTRIAL BUILDING, 221 WAI YIP STREET,
KWUN TONG, KOWLOON, HONG KONG

TELEPHONES: (852)2345-1111 FAX: (852)2797-8047 TELEX: 52984 SANFM HX

EMAIL ADDRESS: info@sanden.com.hk WEB SITE: www.sanden.com.hk

新電電機有限公司
九龍官塘偉業街二二一號
吳德工業大廈下座九字樓

特色:

- 半自动化操作，方便简单

FV-30DA 可选择人手或半自动化操作。除了放料及将成品割下须人手处理，其余工序由抽真空，冷却，至吹气脱模等过程全部自动操作。

- 品质划一

胶料预热，抽真空及冷却等步骤皆设有电子时间控制器，使制品品质划一。

- 适合多种用途

一般的胶料如 PVC, PE, PC, PS，厚度不超过 0.2mm 至 0.8mm 的范围皆可应用。用途包括真空成型，密着包装,适合一般商品,五金零件,玩具,装饰品等包装。

- 本公司亦备有较低生产力的单头型号 FV-30SA 可供选择。

规格表:

项目/机型	FV-30DA	FV-30SA
吸索面积	不能超过 550mmx700mm (22" x 28")	
料架面积	不能超过 600mmx750mm (24" x 30")	
成型深度	125 mm (5")	
机头行程	150 mm (6")	
胶料厚度	0.2 mm - 1 mm	
机身尺寸	2188mmx1113mmx1575mm	1550mmx1113mmx1575mm
热盘电压	8000 Watts	
真空泵容量	1 H.P.	
压缩泵容量	1 H.P.	
电源入力	3 Phase 220V~440V	
净重	520 Kg	280 Kg
毛重	670 Kg	340 Kg
装箱尺寸	4.4 cbm	3.4 cbm

以上规格，如有更改，恕不另行通知。



Sanden Electronic Equipment Ltd.

9/F, BLOCK E, MAI TAK INDUSTRIAL BUILDING, 221 WAI YIP STREET,
KWUN TONG, KOWLOON, HONG KONG

TELEPHONES: (852)2345-1111 FAX: (852)2797-8047 TELEX: 52984 SANFM HX

EMAIL ADDRESS: info@sanden.com.hk WEB SITE: www.sanden.com.hk

新電電機有限公司
九龍官塘偉業街二二一號
吳德工業大廈下座九字樓